

FLEXPLUS™

PROCESS


1. DESIGN INPUT

Furniture pieces are designed by our team of award winning designers.




2. FOAM CUTTING

Foam is cut to desired shape.

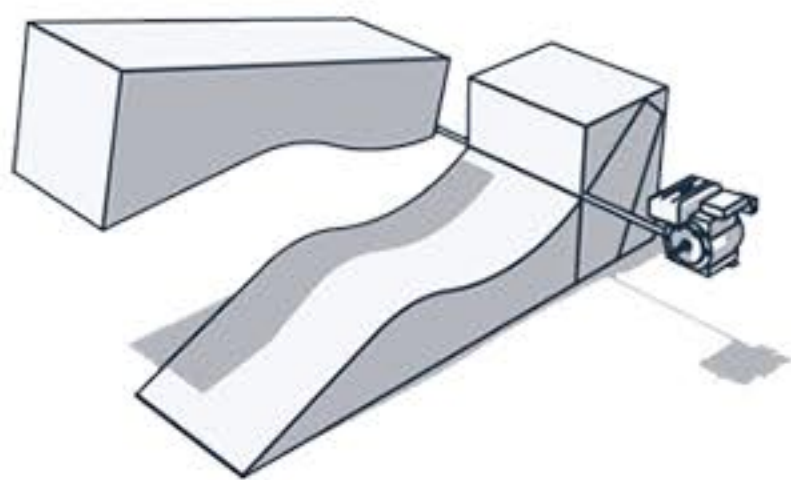


3. COATING

Multi-layered process for the application of our FlexPlus® coating.

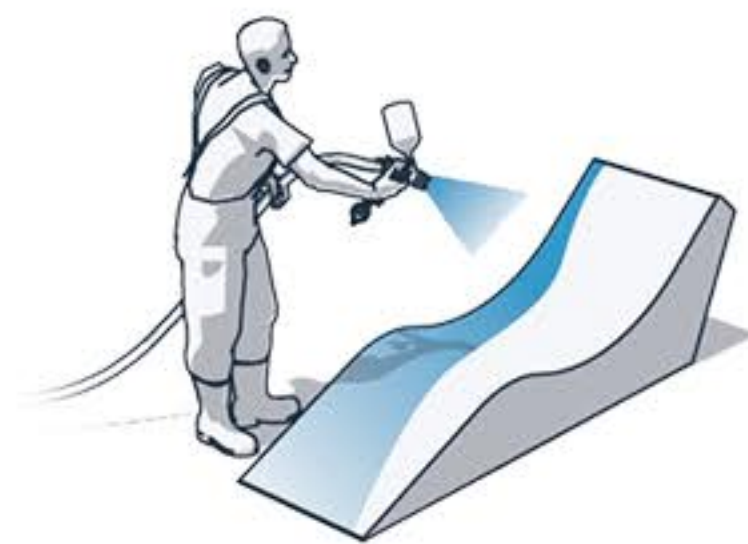


SPECIFICATIONS

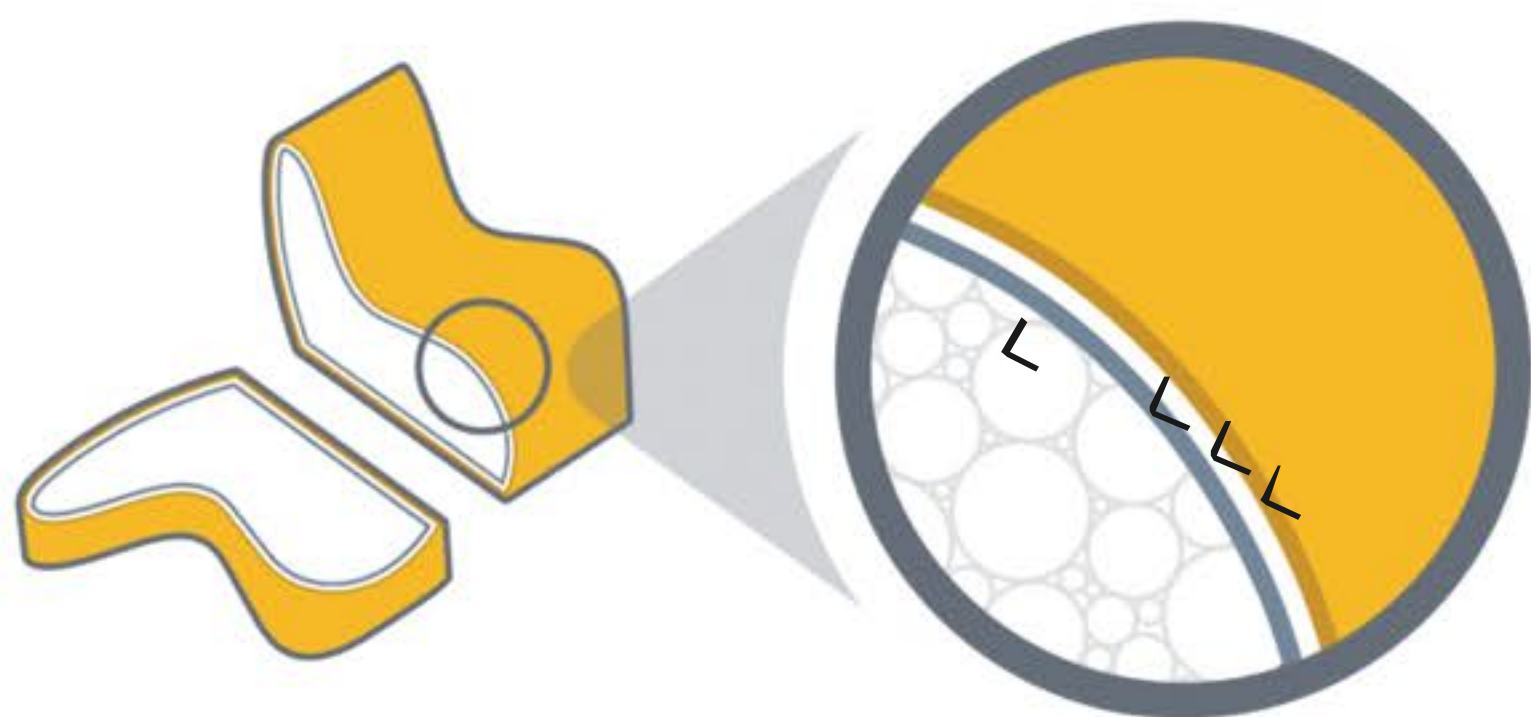


COLORS


PRIMARY

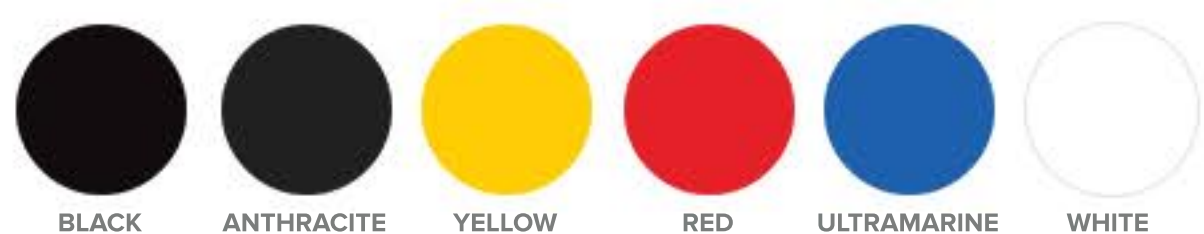

VIBRANT

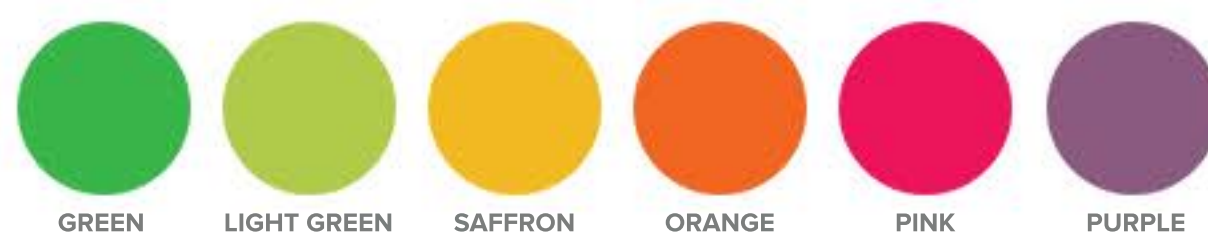

EARTH TONES

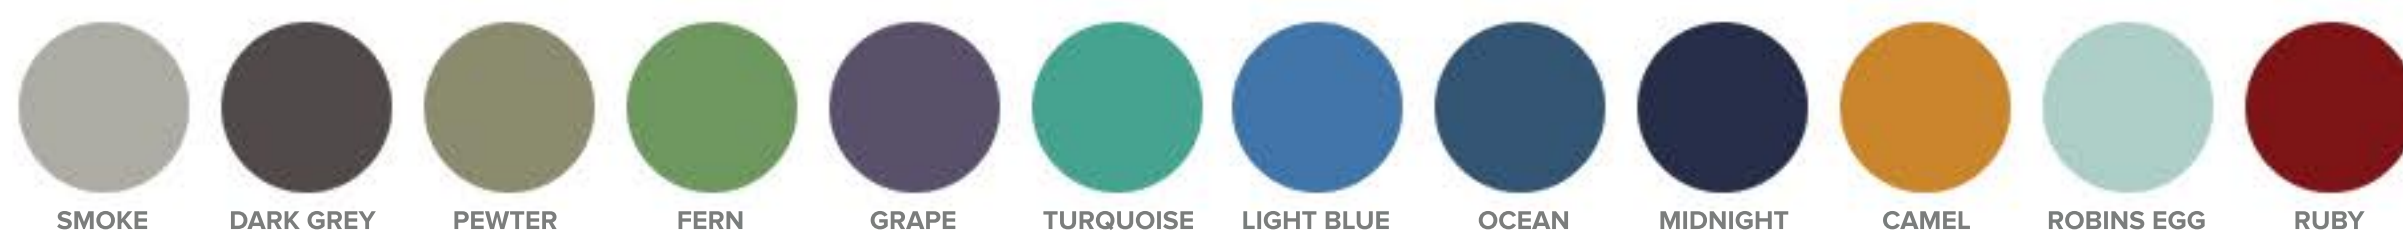

METALLICS



MAINTENANCE

CLEAN

Code SW - Use warm water with a mild detergent with no more than 10% bleach content, i.e. Method, Clorox Cleaner + Bleach, 409, and a cotton cloth.

Clean with water-based cleaning agents, foam or pure solvents that are petroleum-based. Oil based stains clean best with solvent cleaners.

STAIN

Use Clorox Cleaner + Bleach to remove or reduce staining.

